


GULLIVER RSD SERIES

The Riello Gulliver RS5D is a new model of the series of two stage gas burners, characterized for its small dimensions in spite of its high combustion performance. It has been developed to respond to any request for home heating, conforming to current regulations in force. This models uses the same components designed by Riello for the Gulliver series. The high quality level guarantees safe working. The burners are fitted with a microprocessor-based burner safety control box which supplies indication of operation and diagnosis of fault cause. In developing this burner, special attention was paid to reducing noise, the ease of installation and adjustment, to obtaining the smallest size possible to fit into any sort of boiler available on the market. This model is approved by the EN 676 European Standard and European Directives, Gas Appliance, EMC, Low Voltage, Boiler Efficiency. The Gulliver RS5D burner is tested before leaving the factory.



RS5D	160/208 ÷ 345	kW
RS5D TL	160/208 ÷ 345	kW

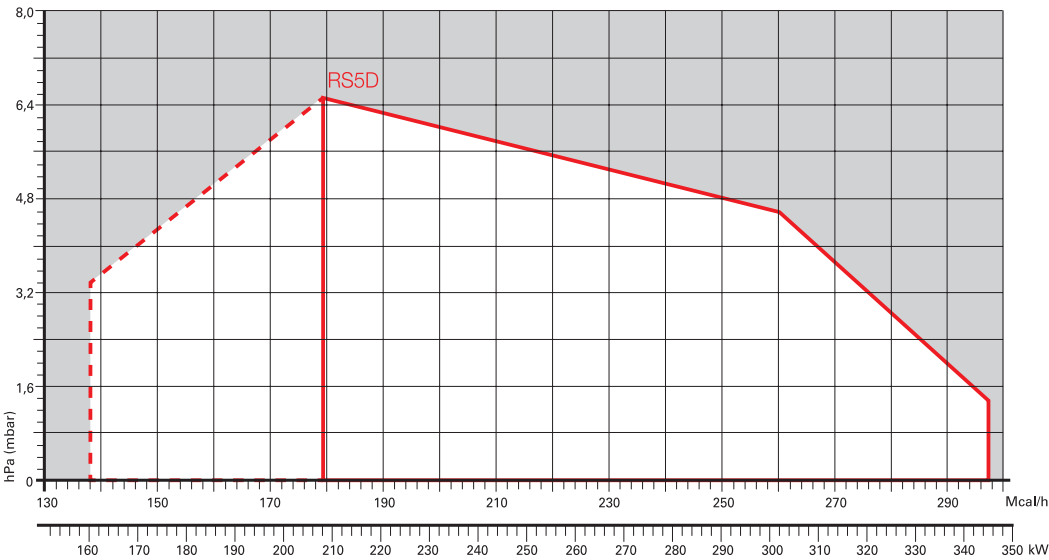

Useful working field for choosing the burner

1st stage operation range


Test conditions conforming to EN676
Temperature: 20°C
Pressure: 1013,5 mbar
Altitude: 0 m a.s.l.

Two Stage Gas Burners

GULLIVER RSD SERIES


Overall dimensions (mm)

BURNER

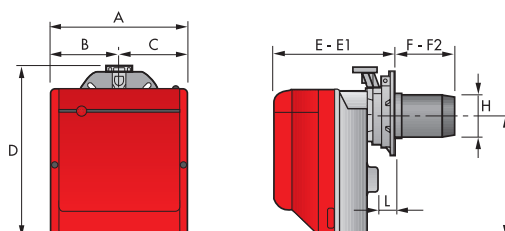


MODEL	A	B	C	D	E	E1	F	F2	H	I	L
► RS5D	300	150	150	392	278	300	203	225	137	286	45
► RS5D TL	300	150	150	392	278	300	382	360	137	286	45

BURNER - BOILER MOUNTING FLANGE



MODEL	A	C	C1	C2	F	O	Q	R
► RS5D	137	203	170	200	218	80,5	45°	11
► RS5D TL	137	203	170	200	218	80,5	45°	11

PACKAGING

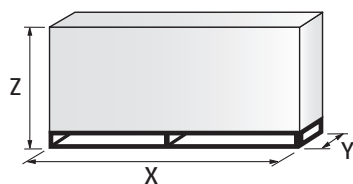

MODEL	X	Y	Z	kg
► RS5D	600	345	430	18
► RS5D TL	703	335	435	20

Two Stage Gas Burners

GULLIVER RSD SERIES

RIELLO

Specification

DESIGNATION OF SERIES

Series: R	Standard emission burner
B	Low NOx burners
Fuel: S	Natural gas
SP	LPG
G	Light oil
Size	
Possible variations: R	Light oil pre-heater
K	Cone shaped head
S	Reduced output ignition
D	Two stage output operation
Head : ...	Standard head
TL	Extended head
Electrical supply to the system:	1/230/50 1/230V/50Hz

R	S	S	D		1/230/50
---	---	---	---	--	----------

STATE OF SUPPLY

Monoblock, gas burner, completely automatic, with two stage settings fitted with:

- Fan with forward curve blades
- Cover lined with sound - proofing material
- Air damper, with 1st and 2nd stage adjustment, driven by an electric servomotor
- Single phase electric motor 230 V, 50 Hz
- Combustion head fitted with:
 - stainless steel head cone, resistant to high temperatures
 - ignition electrodes
 - ionisation probe
 - gas distributor
 - flame stability disk
- Flame inspection window
- Adjustable air pressure switch, with graduated selector, to guarantee burner lock out in the case of insufficient combustible air
- Microprocessor-based burner safety control box, with diagnostic and remote reset functions
- Protection filter against radio interference (included into burner safety control box)
- IP X0D (IP 40) electric protection level.

Standard equipment:

- Sliding flange
- Flange insulation screen
- Screws and nuts for fixing the flange to the boiler
- 7-pin plug
- 4-pin plug
- Remote control release kit
- Instruction handbook for installation, use and maintenance
- Spare parts catalogue.

GAS

Two Stage Gas Burners

GULLIVER RSD SERIES

Available models

Burners

CODE	MODEL	HEAT OUTPUT		TOTAL ELECTRICAL POWER (kW)	CERTIFICATION	NOTE
		(kW)	NATURAL GAS (Nm ³ /h)			
3762058	RS5D 1/230/50	160/208 – 345	16/20,8 – 34,5	0,450	CE – 0085 BN0325	(1)
20052615	RS5D TL 1/230/50	160/208 – 345	16/20,8 – 34,5	0,450	CE – 0085 BN0325	(1)

Net calorific value G20: 10 kWh/Nm³ – Density: 0,71 kg/Nm³.
The burners of RSD series are in according to EN 676.
(1) With plug and socket.

Gas Trains

GAS TRAIN CODE *	GAS TRAIN MODEL	NATURAL GAS		LPG		NOTE
		BURNER (type)	ADAPTER (code)	BURNER (type)	ADAPTER (code)	
3970542	MB 410/2 – F3SD 20	RS5D		RS5D		(1) (2)
3970543	MB 412/2 – F3SD 20	RS5D		RS5D		(1) (3)
3970582	MB 415/2 – F3SD 20	RS5D		RS5D		(1)

Please see Designation of Gas Train Series in the page before the Catalogue index.

* Gas trains are 230V/50Hz – 220V/60Hz electrical supply.

(1) With installed plug.


(2) RS5D ≤ 200 kW with natural gas.

(3) RS5D ≤ 300 kW with natural gas.

The valve seal control device is compulsory (conforming to EN 676) on gas trains to burners with a maximum output over 1200 kW.
To select the gas train please refer to the technical data leaflet and/or instruction manual.

Burner accessories

Extended head kit



Burners standard head can be transformed into “extended head” versions by using the special kit.

BURNER	STANDARD HEAD LENGTH (mm)	EXTENDED HEAD LENGTH (mm)	KIT CODE
► RS5D	203 ÷ 225	357 ÷ 372	3001016

LPG kit



For burning LPG gas, a special kit is available to be fitted to the combustion head on the burner, as shown in the following table.

BURNER	KIT CODE FOR STANDARD HEAD	KIT CODE FOR EXTENDED HEAD
► RS5D	3001011	3001011

Burner accessories


Ground fault interrupter kit



A "Ground fault interrupter kit" is available as a safety device in case of electrical system fault. It is supplied with burners with pin plug.

BURNER	KIT CODE
► RS5D	3001180

Multibloc rotation kit



There is a special kit available that can be used to install the burner turned 180°. This kit is designed to ensure the gas train valve properly.

BURNER	KIT CODE
► RS5D	3001178

7-pin plug kit

If necessary a 7-pin plug kit is available (in packaging of n. 5 pieces).

BURNER	KIT CODE
► RS5D	3000945

PC interface kit



To connect the control box to a personal computer for the transmission of operation, fault signals and detailed service information, an interface adapter with PC software are available.

BURNER	KIT CODE
► RS5D	3002731

Gas train accessories

Seal control kit



To test the valve seals on the gas train a special "seal control kit" is available.

GAS TRAIN	KIT CODE for 50 Hz operation	KIT CODE for 60 Hz operation
► MB/1 type	3010123	20050030