### **EZ 100** Multimeter

## **Test the TPI Advantage**




#### **APPLICATIONS**

- Measure line and control circuit voltages.
- Measure resistance of motor windings, transformers and solenoids.
- Make general AC and DC vlotabe and resistance measurements.
- Measure the resistance of elements and electric heater cores.
- Test continuity of wiring
- Verify voltage at breakers and outlets.
- Use as a back-up meter in your tool box.

### No More Guessing, EZ One Button Operation

The new TPI 100 automatically switches between AC and DC Voltage as well as resistance measurements. No more guessing what range to switch your meter to. The TPI 100 does it automatically.

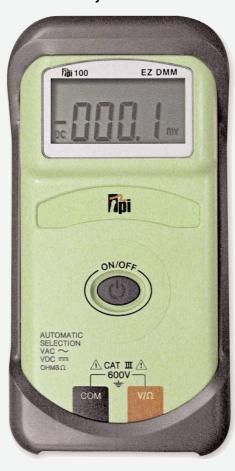

#### **Features**

- EZ to use one button operation
- Automatically Measures DC Volts, AC Volts and Ohms (Resistance)
- Large 4,000 Count Display
- 0 to 600 Volts AC and DC
- 10M Ohm impedance
- Auto Power Off After 10 Minutes
- Includes Test Lead Set, Batteries and Protective Rubber Boot
- 3 Year Limited Warranty

**EZ 100 Comes Complete With:** (2) A002 1.5V Battery, A040 Test Lead Set. A101 Rubber Boot



EZ 100 shown with standard A101 tilt stand protective boot

#### **Accessories**

STANDARD ACCESSORIES	
Test Lead Set	A040
1.5V Battery (2)	A002
Protective Rubber Boot	A101
OPTIONAL ACCESSORIES	
Deluxe Test Lead Set	SDK1C
IEC 1010 Deluxe Test Lead Kit	TLS2000BC
Push on alligator clips	A140
Boot Hook	A120
Soft Carrying Case	A100

### **EZ 100** Multimeter

# **Test the TPI Advantage**



TPI offers acomplete lineof...

CO, Combustibles & Combustion (CEA)

Refrigerant Leak Detectors

**Digital Manometers** 

Temperature Contact & IR Instruments

IAQ: Air Flow / Humidity

Handheld Oscilloscopes

Digital Multimeters & Clamp-on Meters

Accessories & Kits

e e	-	B 1.:		
<u>Function</u>	<u>Range</u>	<u>Resolution</u>	<u>Accuracy</u>	
DCV	1.5V to 4V	0.001V		
	40.00V	0.01V	±(0.5% + 4)	
	400.0V	0.1V	, ,	
	600V	0.1V	±(0.8% +4)	
ACV	1.7V to 4V	0.001V		
	40.00V	0.01V	±(0.8% +4)	
	400.0V	0.1V	, , ,	
	600V	1V	±(1.2% +4)	
OHM	400.0	0.1		
	4.000k	0.001k		
	40.0k	0.01k	±(0.8% +4)	
	400.0k	0.1k		
	4.000M	0.001M		
	40.00M	0.01M	±(2.0% +4)	
Safety CAT II 1,000-V / CATIII 600V		CATIII 600V		
Power Supply (3		(2) 1.5 Volt "AA"	(2) 1.5 Volt "AA" Batteries	
Battery Life		560 hrs. Alkaline	560 hrs. Alkaline	
Size	33mm x 86mm x 187 (1.3" x 3.4" x 7.4")		187 (1.3" x 3.4" x 7.4")	
Weight	Veight 340g (12oz)			

Distributed By: Accutherm International 18 Pickering Road Mulgrave 3170 +61 3 9763 6335